

## Versáta CIC / MC Petite


### Technical Data

#### Ear simulator data


EN / IEC 60118 and IEC 60711



#### Output sound pressure level

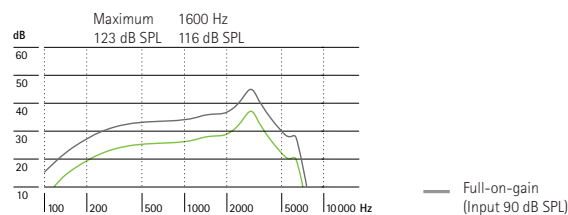

#### Acoustic gain

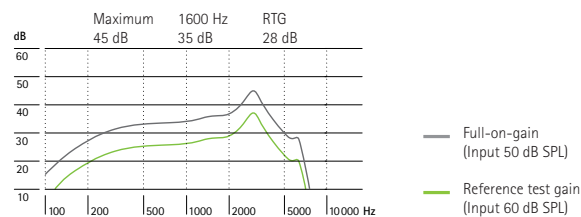

Frequency range	150 Hz – 7000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.0%	1.0%
Battery current	Quiescent	Working	
	0.9 mA	0.9 mA	
Equivalent input noise level	19 dB SPL		

#### Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms

CIC/mini canal, battery size 10 (for fitting range, product details and available options, please see "Versáta Product Information" or visit [www.phonak.com](http://www.phonak.com)).


Versáta Petite devices do not have wireless functionality, but support remote controls like KeyPilot2/WatchPilot2. Unless otherwise specified, all data obtained are measured with 5 mm tubing and iPFG measurement settings.

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.


## 2cm<sup>3</sup> coupler data

ANSI S3.22-2003


### Output sound pressure level

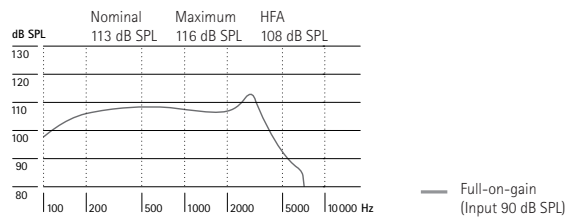

### Input / Output characteristics at 2000 Hz

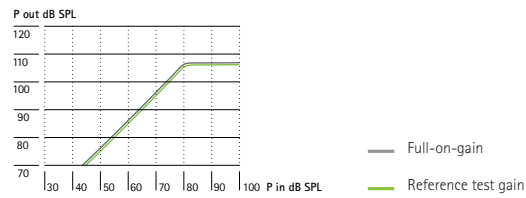

### Acoustic gain

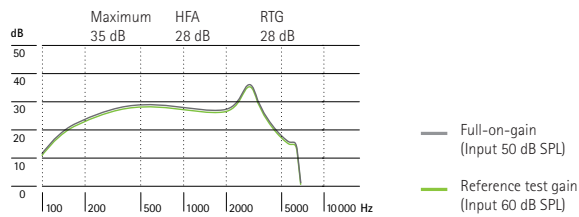

Frequency range	< 100 Hz – 7000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.0%	1.0%
Equivalent input noise level	19 dB SPL		

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms