





Phonak Virto P-Titanium (P90/P70) (M)

0.4 cm³ coupler data

Output sound pressure level

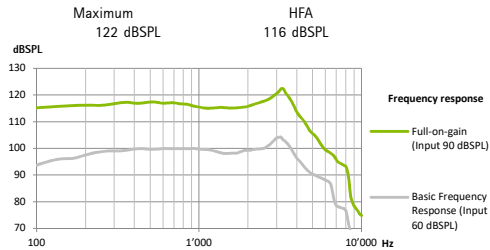

Acoustic gain

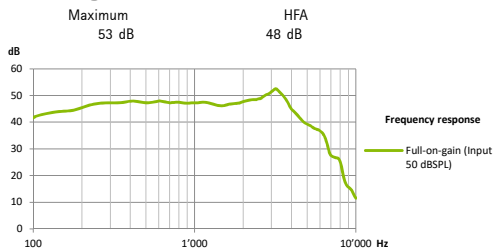


Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.5%	1.0%	1.0%
Battery current	1.1	mA		
Equivalent input noise level	19	dB SPL		


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

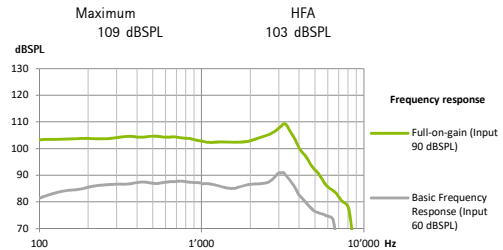


Acoustic gain

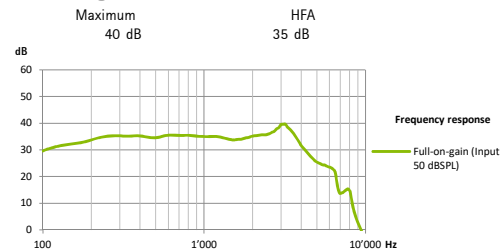

Frequency range	<100 Hz - >7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.5%	1.0%	1.0%
Battery current	1.1	mA		
Equivalent input noise level	19	dB SPL		

Induction coil sensitivity

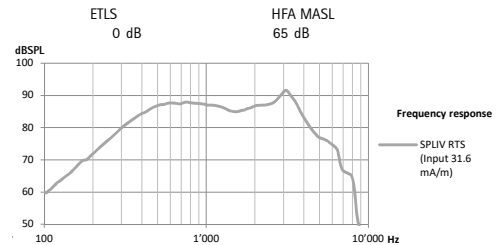

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum




WARNING: Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.




Phonak Virto P-Titanium (P90/P70) (P)

0.4 cm³ coupler data

Output sound pressure level

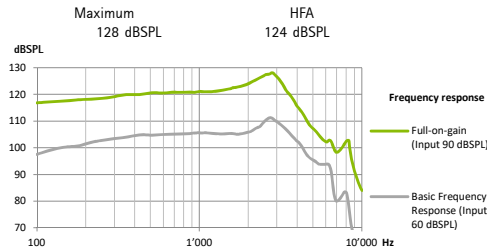

Acoustic gain

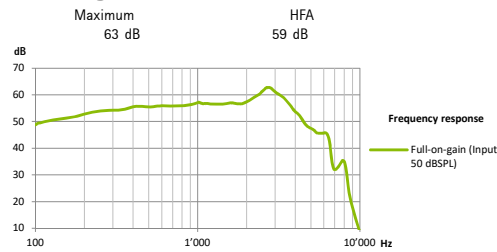


Frequency range	<100 Hz - 6700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.2	mA		
Equivalent input noise level	19	dB SPL		


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

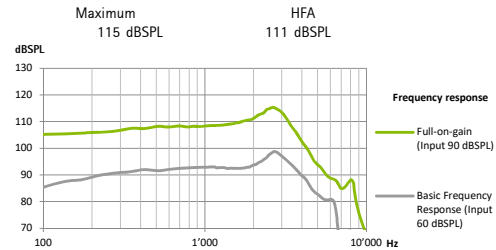


Acoustic gain

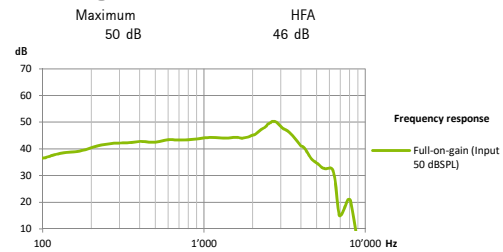

Frequency range	<100 Hz - 6700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.2	mA		
Equivalent input noise level	19	dB SPL		

Induction coil sensitivity

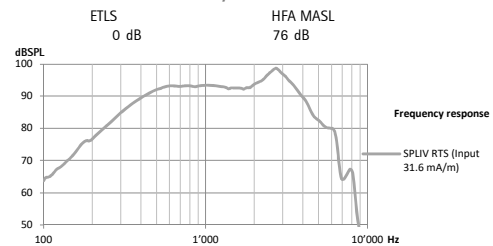

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum







Phonak Virto P-Titanium (P90/P70) (SP)

0.4 cm³ coupler data

Output sound pressure level

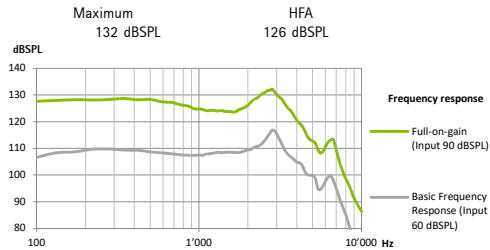

Acoustic gain

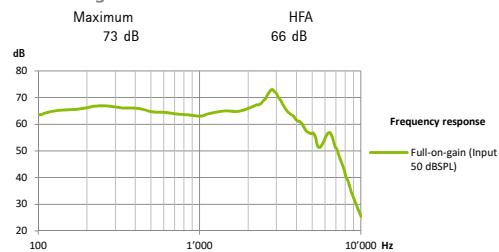


Frequency range	<100 Hz - 7500 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.1 mA			
Equivalent input noise level	19 dB SPL			


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

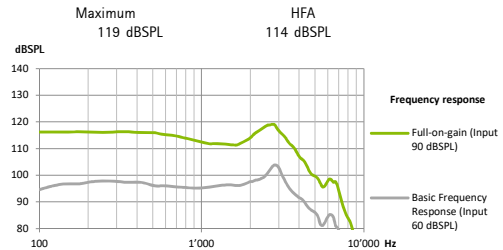


Acoustic gain

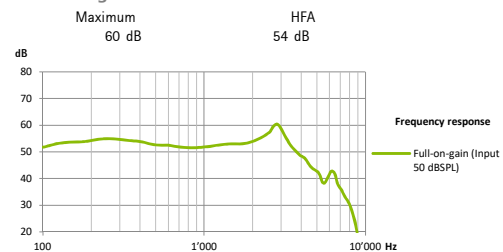

Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.1 mA			
Equivalent input noise level	19 dB SPL			

Induction coil sensitivity

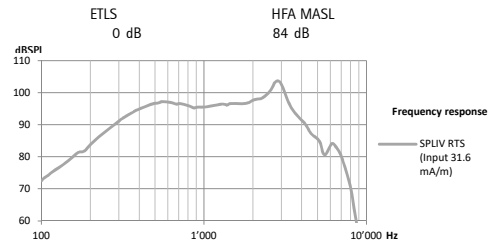

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum