

Una™ ITC / HS


2 cm³ coupler data

ANSI S3.22-1996

Output sound pressure level

Nominal	Maximum	HFA
113 dB SPL	116 dB SPL	109 dB SPL


— Full-on gain
(Input 90 dB SPL)

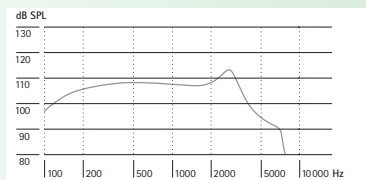

2 cm³ coupler data

Input / Output characteristics at 2000 Hz


— Full-on gain
— Reference test gain

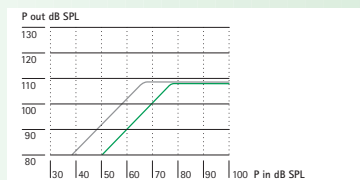

Acoustic gain

Maximum	HFA	RTG
48 dB	42 dB	32 dB

— Full-on gain
(Input 50 dB SPL)
— Reference test gain
(Input 60 dB SPL)

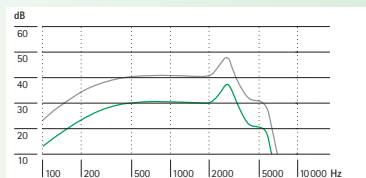


Frequency range	< 100 Hz – 6400 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.0%	1.0%
Battery current	Quiescent	Working	
	1.0 mA	1.1 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

HFA – SPLIV	TLS
94 dB SPL	+2 dB

— Reference test gain
(Input 31.6 mA/m)

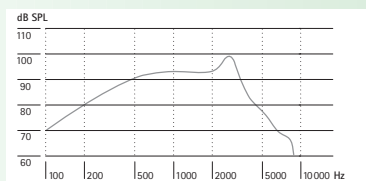

Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms