




## Phonak Naída L-M (L90/L70/L50/L30)

### Standard Earhook HE11 680


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

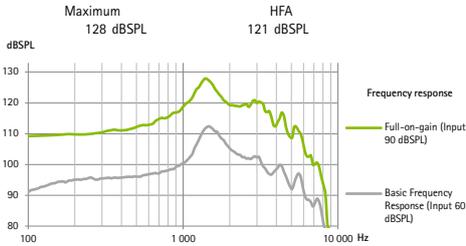


#### Acoustic gain

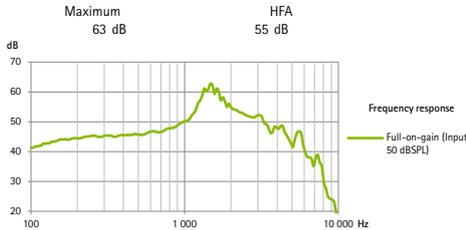

Frequency range	<100 Hz - >7800 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	5,0%	3,0%	2,0%	1,0%
Battery current	1,6 mA			
Expected operating time*	107 h			
Equivalent input noise level	19 dB SPL			

#### Induction coil sensitivity

ETLS	HFA SPLIV
1 dB	105 dB SPL

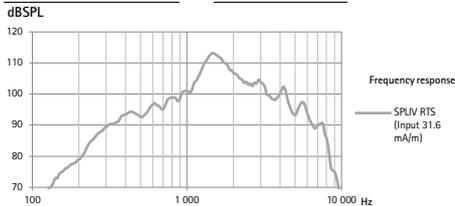


### SlimTube HE


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

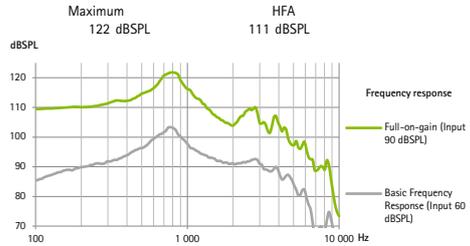


#### Acoustic gain

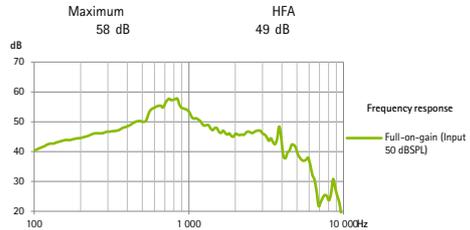

Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,5%	1,5%	2,0%	1,0%
Battery current	1,6 mA			
Expected operating time*	107 h			
Equivalent input noise level	19 dB SPL			

#### Induction coil sensitivity

ETLS	HFA SPLIV
1 dB	95 dB SPL

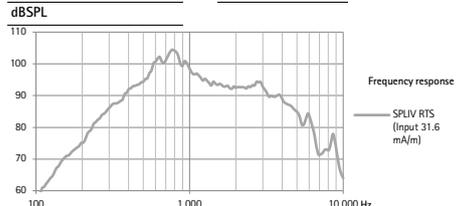

#### General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms

#### Warnings

- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.
- ⚠ The developed SPL in the ears of children can be substantially higher than in average adults. RECD measured to correct target of fitter OSPL90 is recommended.

\* Battery performance depends on active features, the use of wireless accessories, hearing loss, battery age, sound environment and earpiece. Note that for non-rechargeable ZnAir batteries operating time might vary depending on the battery model



Sonova AG · Laubisrütistrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand

