




Phonak Bolero M-PR (M90/M70/M50/M30)


SlimTube 4.0 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

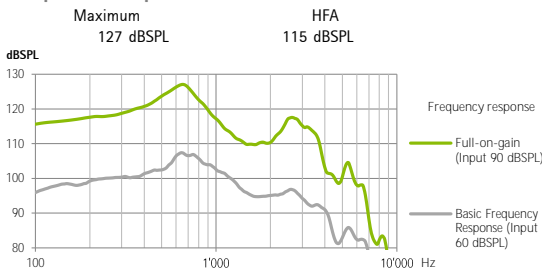

Acoustic gain

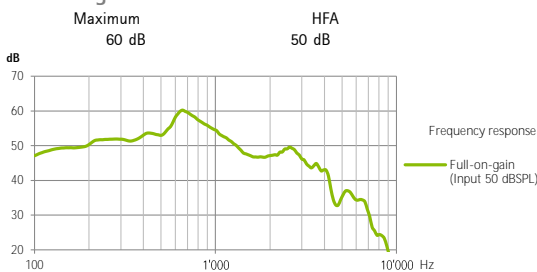


Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	2.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19 dB SPL			


HE11 680 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

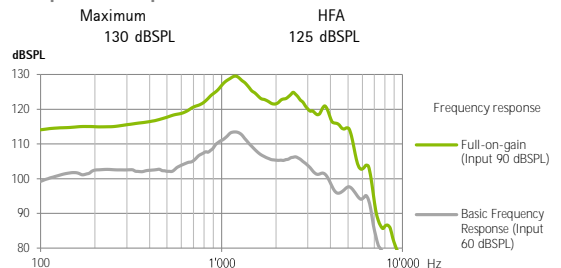

Acoustic gain

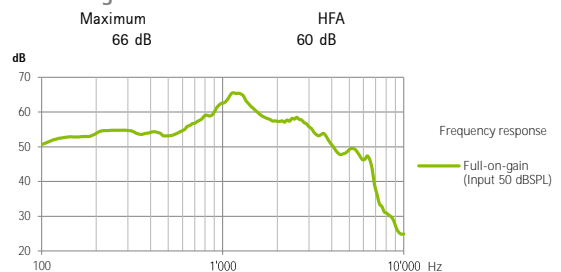

Frequency range	<100 Hz - 6800 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	4.0%	3.0%	2.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19 dB SPL			

General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

Warning

- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted.
Such changes may damage the ear or the hearing aid