




Phonak Naída P-PR (P90/P70/P50/P30/Trial)

SlimTube HE


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

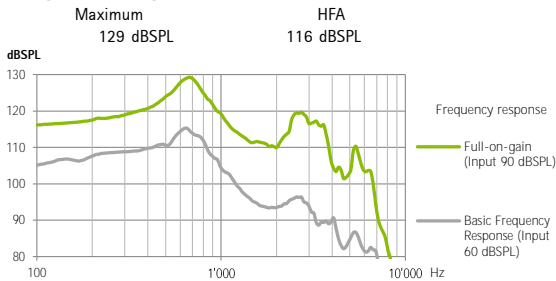

Acoustic gain

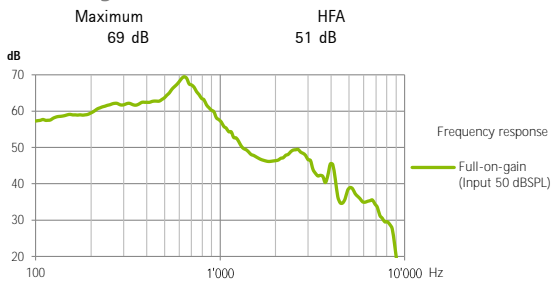

Frequency range	<100 Hz - >7100 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			

HE11 680


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level



Acoustic gain

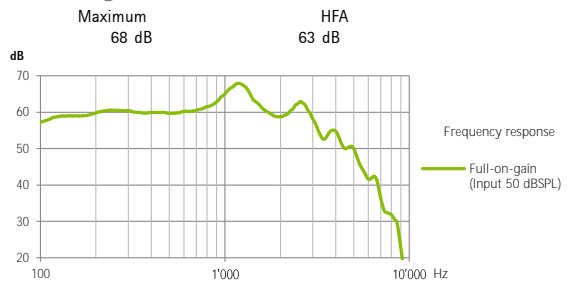

Frequency range	<100 Hz - >5700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	4.0%	3.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

General test information

- Specific measurement settings are used: RTS adjustment with volume control.
- The device is operating in linear mode.
- Low-level expansion is active.
- All data obtained are measured with Phonak Target measurement settings.

Warning



Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.