




## Phonak Virto I-R (I90/I70/I50/I30)

### M Receiver


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

#### Output sound pressure level

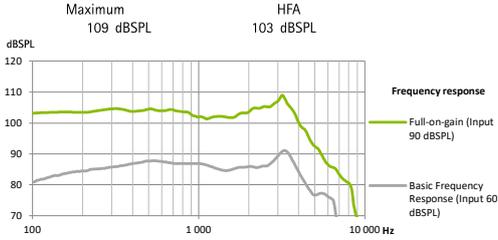

#### Acoustic gain

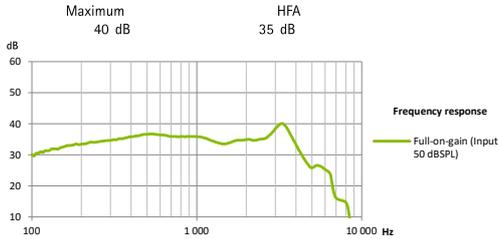


Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,0%	1,5%	1,0%	1,0%
Expected operating time*	24 h			
Equivalent input noise level	19 dB SPL			

### P Receiver


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

#### Output sound pressure level

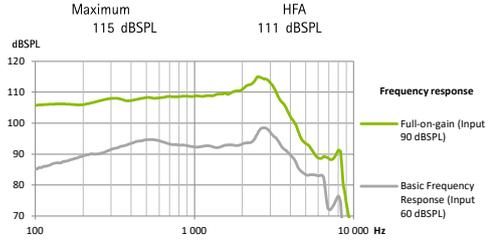

#### Acoustic gain

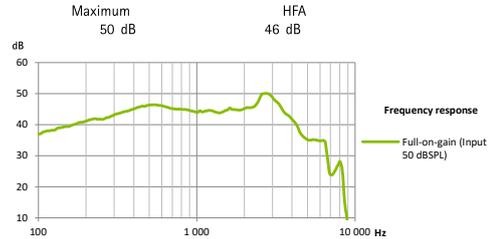

Frequency range	<100 Hz - 6700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,0%	1,0%	1,0%	1,0%
Expected operating time*	24 h			
Equivalent input noise level	19 dB SPL			

#### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms



Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



Sonova AG · Laubisrütistrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand


**PHONAK**  
life is on

## Phonak Virto I-R (I90/I70/I50/I30)


### SP Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

#### Output sound pressure level

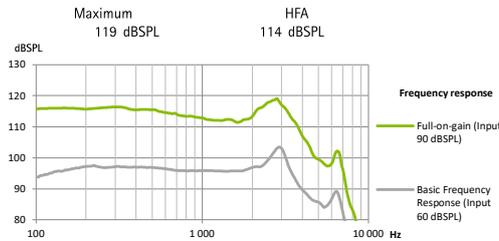

#### Acoustic gain

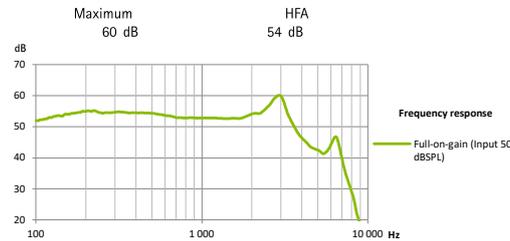


Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,0%	1,0%	1,0%	1,0%
Expected operating time*	24 h			
Equivalent input noise level	19 dBSPL			


### UP Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

#### Output sound pressure level

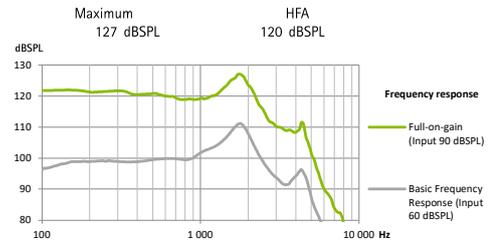

#### Acoustic gain

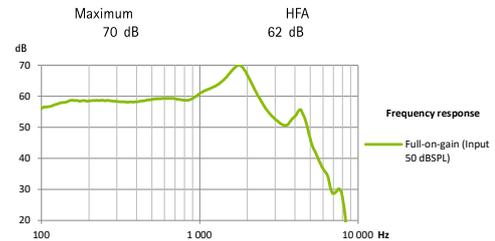

Frequency range	<100 Hz - 5200 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,0%	1,0%	1,0%	1,0%
Expected operating time*	24 h			
Equivalent input noise level	19 dBSPL			

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

