

Naída

Product information

Naída I, Naída III dAZ



Options

SuperPower/UltraPower	Naída I SP	Naída III SP dAZ	Naída I UP	Naída III UP dAZ
Hooks				
HE7 680	S	S	S	S
HE7	O	O	O	O
mini hook HE7 680	O	O	O	O
mini hook HE7	O	O	O	O
Volume control variations				
standard	S	S	S	S
locked (pediatric purpose)	O	O	O	O
T-coil	S	S	S	S
Tamperproof battery compartment	O	O	O	O

Note:
Some options are country dependent.
Please refer to your order form.

S = Standard O = Optional


Naída is the outstanding product line with a broad spectrum of innovations. Naída UltraPower, designed for profound hearing losses, and Naída SuperPower, specially designed for moderately-severe to severe hearing losses. It is based on the newest chip technology from Phonak.

The unique combination of SoundRecover*, WhistleBlock Technology, PowerProcessing and BassBoost offers exceptional levels of audibility and clarity. With SoundRecover (non-linear frequency compression) the wearer will hear more high frequency sounds essential for speech understanding. Feedback is effectively suppressed without gain loss, thanks to the new advanced WhistleBlock Technology.

*Naída III dAZ only


Fitting range

Naída SuperPower



■ Conventional fitting range (Naída I)
■ Extended fitting range for steeply sloping high frequency hearing loss covered by SoundRecover (Naída III dAZ only)

Naída UltraPower



■ Conventional fitting range (Naída I)
■ Extended fitting range for steeply sloping high frequency hearing loss covered by SoundRecover (Naída III dAZ only)

Technical description

- Transparent hook
- Sound outlet
- Miniature microphones with Wind & Weather Protector (WaterResistant)
- Program switch
- Access to programming plug
- Digital volume control
- Serial number
- Battery compartment with ON/OFF switch
- Wind & Weather Protector (WaterResistant) for battery compartment
- Design-integrated FM



PHONAK life is on







Feature and accessories overview

Features	Description	Naída I SP Naída I UP	Naída III SP dAZ Naída III UP dAZ
More Hearing			
SoundFlow	Seamless real-time adaptation to changing sound environments by blending 2 base programs	No automatic	Standard
Channels	Fully programmable digital hearing instrument	6	6
PowerProcessing	Selects the amplification strategy from non-linear to linear, depending on the audiometric configuration and hearing loss	■*	■
BassBoost	Delivers extra low frequency gain and output for instant improvement of subjective loudness perception	■	■
Manual Programs	Up to 4 manual accessible hearing programs	■	■
SoundRecover	Compress and shift high frequencies into an area of audible hearing		■
WhistleBlock Technology	The new benchmark in feedback elimination	■	■
Directionality	As much directionality as you need	Omni-directional	digital AudioZoom
NoiseBlock Processing	Analyzes and recognizes sounds different from speech and automatically reduces them	■	■
DataLogging	Knowing how and when you use your hearing instrument	■	■
Connectivity		*optional linear Signal Processing for Naída I	
EasyFM, EasyPhone, EasyAudio, EasyBluetooth	4 automatic programs for FM, using the phone, binaural stereo streaming of audio signal and hands free binaural mobile phone use		■
FM solution	AS11/ML11i for all SP models AS10/ML10i for all UP models	■	■
iCom	Easy, binaural hands free connection to communication and entertainment devices		■
Click'nTalk	The intuitive mobile phone link		■
myPilot	A command centre with full-color display and unique access to hearing and instrument control		■
iView	Shows HI battery status, current hearing program and volume settings		■
Dependability			
WaterResistant	Dependability, no matter where or what	■	■
Wind & Weather Protection	Gets rid of annoying wind sounds	■	■
Secure 'n Stay	Secure 'n Stay SP for all SP models Secure 'n Stay UP for all UP models	■	■
Colors	Beige (01), Brown (03), Taupe (35), Light gray (04), Black (06), High-tech gray (12), Gray (23), Blonde (49), Chestnut brown (50), Pure transparent (13), Red transparent (36), Blue transparent (37), Purple transparent (38), Palladium/Black (70), Safari Stripes (B3), Savannah Beauty (B4), Light pink (33), Light blue (34)	■	■
Battery Size		Naída SP Naída UP	13 675
Fitting			
CableFree Fitting	The days of untangling are over with iCube		■
Hardware	PC, iCube or NOAHLink or HI-Pro	■	■
Fitting Software	Minimal iPGF Version	iPGF 2.4	iPGF 2.4


Key features

The complete range of data sheets is available on www.phonak.com




SuperPower	Naída I SP	Naída III SP dAZ
		
Performance profile	HE7/HE7 680	HE7/HE7 680
Maximum Power Output (dB SPL)	2 cc coupler 140/133	140/133
	Ear Simulator 141/138	141/138
Maximum gain (dB)	2 cc coupler 75/68	75/68
	Ear Simulator 80/73	80/73
Frequency range – 2 cc coupler (Hz)	<100 – 6400	<100 – 6400
Frequency range – Ear Simulator (Hz)	<100 – 6900	<100 – 6900
Battery size	13	13
Working current (mA)	1.3	1.3

UltraPower	Naída I UP	Naída III UP dAZ
		
Performance profile	HE7/HE7 680	HE7/HE7 680
Maximum Power Output (dB SPL)	2 cc coupler 142/135	142/135
	Ear Simulator 144/139	144/139
Maximum gain (dB)	2 cc coupler 82/75	82/75
	Ear Simulator 85/80	85/80
Frequency range – 2 cc coupler (Hz)	<100 – 4900	<100 – 4900
Frequency range – Ear Simulator (Hz)	<100 – 5000	<100 – 5000
Battery size	675	675
Working current (mA)	1.3	1.3

Accessories

SuperPower/UltraPower	Naída I SP	Naída III SP dAZ	Naída I UP	Naída III UP dAZ
Digital wireless accessories				
				
CROSLink	✓	✓	✓	✓
Secure 'n Stay SP retention	✓	✓		
Secure 'n Stay UP retention			✓	✓
Spectacle adaptor	✓	✓	✓	✓

FM Solutions

SuperPower/UltraPower	Naída I SP	Naída III SP dAZ	Naída I UP	Naída III UP dAZ
Design-integrated FM receiver (WaterResistant)				
				
Universal FM receivers				
				
FM Transmitters				
				

¹ Tamperproof battery compartment available as an option
² neckworn FM receiver


FM solutions colors:

ML10i/ML11i:
 Beige (01), Brown (03), Taupe (35), Light gray (04), Black (06), Gray (23),
 Chestnut brown (50), Light pink (33), Light blue (34)

AS10/AS11:
 Beige (01), Brown (03), Black (06), Taupe (35)

Programming

CableFree Fitting with iCube

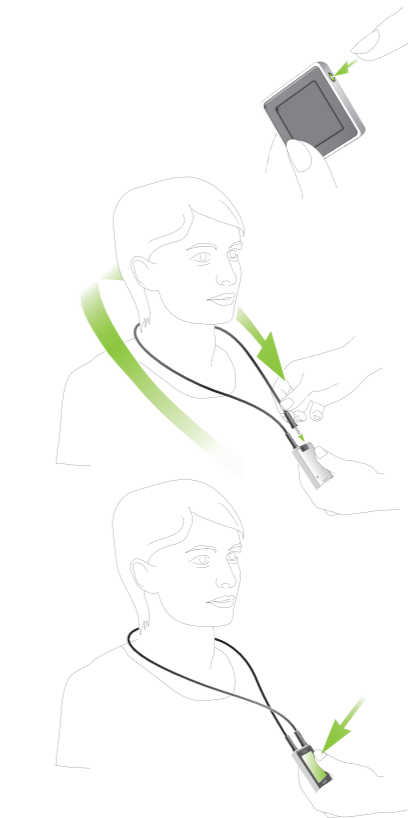

1. Switch iCube on and check the Bluetooth connection to the computer (blue LED blinking slowly).

2. Put the neckloop around the customers neck and connect to the iCube.

3. Check the connection between the hearing instruments and iCube by pressing the button of the iCube (middle LED lights up for 3 seconds).

Via Cable (NOAHlink, HI-PRO)



1. Flip open the cover for the programming socket.

2. Connect the programming plug into the socket. Use the programming cable CS-44 A (Phonak version) only.