



Compact power BTE with battery size 13 and adaptive digital AudioZoom

**Warning to dispenser:**

This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.

Unless otherwise specified, all data obtained are measured with the hook type HE7 680 and in the dSC mode.

Measurements were taken in October 2005 and are subject to change without notice.

## Ear simulator data

EN / IEC 60118 and IEC 60711


### Output sound pressure level

(Input 90 dB SPL)

Maximum	1600 Hz
139 dB SPL	133 dB SPL

### Frequency response

— Max. gain  
(Input 90 dB SPL)

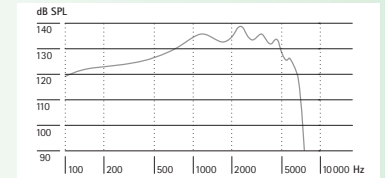


### Acoustic gain

(Input 50 dB SPL)

Maximum	1600 Hz	RTG
75 dB	68 dB	58 dB

### Frequency response

— Max. gain  
(Input 50 dB SPL)  
— Reference test gain  
(Input 60 dB SPL)

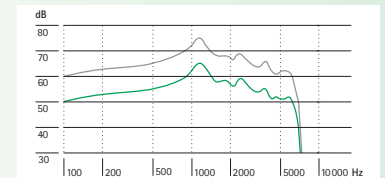

Frequency range (DIN 45605) <100 – 6800 Hz

Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	5%	4%	1%

Battery current	Quiescent	Working
	1.0 mA	1.1 mA

Equivalent input noise level 19 dB SPL


### Induction coil sensitivity

(Input 1 mA/m)

Maximum	1600 Hz
105 dB SPL	98 dB SPL

### Frequency response

— Reference test gain  
(Input 31.6 mA/m)

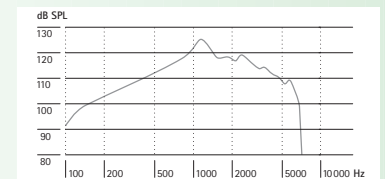

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms

# Eleva™ 411 dAZ

## 2 cm<sup>3</sup> coupler data

ANSI S3.22-1996


### Output sound pressure level

(Input 90 dB SPL)

Maximum	HFA
131 dB SPL < 134 dB SPL	127 dB SPL

### Frequency response


— Full-on-gain  
(Input 90 dB SPL)

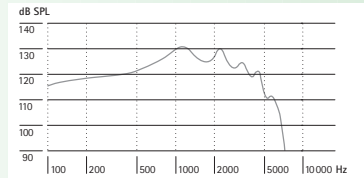

## 2 cm<sup>3</sup> coupler data

### Input / Output characteristics at 2000 Hz

— Full-on-gain  
— Reference test gain

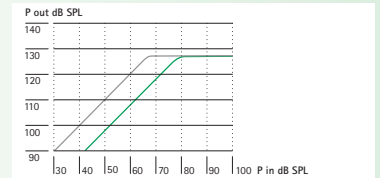


### Acoustic gain

(Input 50 dB SPL)

Maximum	HFA	RTG
70 dB	62 dB	50 dB

### Frequency response

— Full-on-gain  
(Input 50 dB SPL)  
— Reference test gain  
(Input 60 dB SPL)

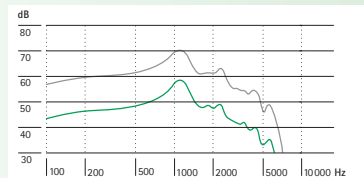

Frequency range < 100 – 6200 Hz

Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	3 % < 6 %	2 % < 5 %	1 % < 4 %

Battery current	Quiescent	Working
	1.0 mA	1.1 mA < 1.3 mA

Equivalent input noise level 19 dB SPL < 22 dB SPL


### Induction coil sensitivity

(Input 31.6 mA/m)

HFA – SPLIV	TLS
110 dB SPL	0 dB

### Frequency response

— Reference test gain  
(Input 31.6 mA/m)

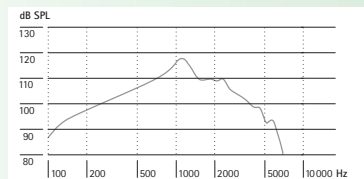

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms