






Phonak Terra™ + Phonak Terra™

Product information

Phonak Terra+ and Phonak Terra provide a balanced set of features for a personalized hearing experience with RIC and BTE.



Product description

						
		Terra+ RIC-R	Terra+ RIC-312 Terra RIC-312	Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP
Battery size		built-in rechargeable	312	312	13	675
Telecoil				•	•	•
Bluetooth®		•	•	•	•	•
Hydrophobic coating		•	•	•	•	•
IP rating		IP68 ¹	IP68 ¹	IP68 ¹	IP68 ¹	IP68 ¹
Dimensions	L x W x D	27.7 x 12 x 8.1 mm (1.09 x 0.47 x 0.32")	26.8 x 11.2 x 7.1 mm (1.05 x 0.44 x 0.28")	31.3 x 14.16 x 7.3 mm (1.23 x 0.56 x 0.29")	40.0 x 16.9 x 8.5 mm (1.57 x 0.67 x 0.33")	42.2 x 18.8 x 8.6 mm (1.68 x 0.74 x 0.34")
	Weight	2.2 g (0.08 oz)	1.1 g (0.04 oz)	2.2 g (0.08 oz)	4.4 g (0.16 oz)	4.6 g (0.16 oz)
Charging times ²	0% to 100%	3 h				
	0% to 80%	1.5 h				
	30 min. fitting	15 min.				

Housing colors

Terra+



H0
Beige



P1
Sand Beige



P3
Sandalwood



P6
Silver Gray



P8
Velvet Black

Terra



H0
Beige



P3
Sandalwood



P6
Silver Gray



P8
Velvet Black

¹ IP68 indicates that the hearing aid is water and dust resistant. It survived continuous immersion in 1 meter of fresh water for 60 minutes and 8 hours in a dust chamber as per the IEC60529 standard.


² Actual charging time depends on the remaining battery life, but it will not exceed 3 hours.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sonova AG is under license.

Acoustic coupling – RIC hearing instruments

Length	S Receiver	M Receiver	P Receiver	UP Receiver
Available in four different lengths (0, 1, 2, 3), left and right	•	•	•	•
Dome				
Cap dome	•	•	•	
Open dome Available in three sizes (S, M, L)	•	•	•	
Vented dome Available in three sizes (S, M, L)	•	•	•	
Power dome Available in three sizes (S, M, L)	•	•	•	
SlimTip*				
Acrylic	•	•	•	
Silicone	•	•	•	
cShell				
Acrylic	•	•	•	•
Titanium	•	•	•	•
2cc coupler data				
Max. Power Output (dB SPL)	111	114	122	132
Max. gain (dB)	47	51	59	71
Frequency range (Hz)	<100 - >8000	<100 - >8000	<100 - 6300	<100 - 6100

Fitting ranges

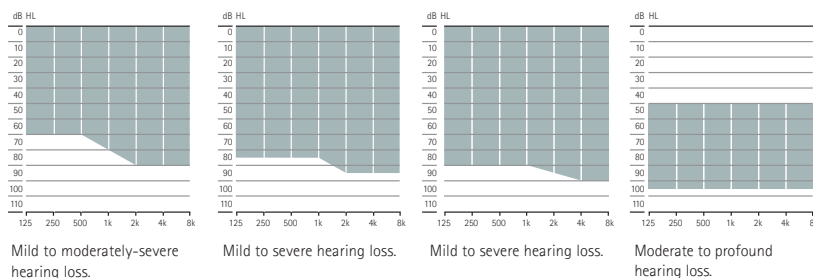

* Available with extra canal length option

Phonak Terra+ RIC-R charging option




Phonak Charger Ease

Acoustic coupling – BTE hearing instruments


Sound outlet		Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP			
Standard earhook	Damped (HE11 680), transparent	•	•	•			
	Undamped (HE11), transparent		•	•			
SlimTube 4.0	Available in left and right in five different lengths (00,0,1,2,3)	•	•				
Earpiece for SlimTube							
Dome	Cap dome	•	•				
	Open dome Available in three sizes (S, M, L)	•	•				
	Vented dome Available in three sizes (S, M, L)	•	•				
	Power dome Available in three sizes (S, M, L)	•	•				
SlimTip	Acrylic	•	•				
	Silicone	•	•				
Earpiece for hook							
Earmold		•	•	•			
2cc coupler data		HE11 680	SlimTube 4.0	HE11 680	HE11	HE11 680	HE11
Max. Power Output (dB SPL)	2 cc coupler	128	122	133	139	134	141
Max. gain (dB)	2 cc coupler	63	58	75	81	78	84
Frequency range (Hz)		<100 - >7800	<100 - >8000	<100 - >5700	<100 - >4900	<100 - >4700	<100 - >4700
Working current (mA)		1.6	1.6	2.2	2.1	2.8	3.3

Fitting ranges


■ SlimTube 4.0
■ HE11 680



Mild to moderate hearing loss, all audiometric configurations



Mild to severe hearing loss, all audiometric configurations



Severe to profound hearing loss, all audiometric configurations

Performance levels

	Terra+ RIC-R/RIC-312 BTE-UP/BTE-SP/BTE-M	Terra RIC-312 BTE-UP/BTE-SP/BTE-M	Features	Terra+ RIC-R/RIC-312 BTE-UP/BTE-SP/BTE-M	Terra RIC-312 BTE-UP/BTE-SP/BTE-M
AutoSense OS™ 5.0					
Speech in Noise	•	•	UltraZoom	•	•
Calm Situation	•	•	Broadband Booster ¹	•	•
AutoSense OS 5.0 (streaming)			User Preference Tuning	•	•
Media speech + mic	•	•	Auto Acclimatization	•	•
Media music + mic	•	•	Environmental balance	•	•
Additional programs			SoundRecover2	•	•
Max. additional programs	4	4	SoundRecover	•	•
Speech in Noise	•	•	WhistleBlock	•	•
Calm Situation	•	•	NoiseBlock	•	•
Comfort in Noise	•	•	QuickSync	•	•
Music	•	•	AOV	•	•
Acoustic phone	•	•	Fine tuning channel	10	8
Custom program	•	•			
Phone via T-coil ± mic ²	•	•			
Public T-coil ± mic ²	•	•			
Streaming programs					
PartnerMic + mic	•	•			
Phone call + mic	•	•			

¹ Available for Phonak Terra+ BTE-UP and Phonak Terra BTE-UP only
² Available for BTE products only

Wireless communication portfolio

	Terra+ RIC-R/RIC-312 BTE-UP/BTE-SP/BTE-M	Terra RIC-312 BTE-UP/BTE-SP/BTE-M
Wireless accessory		
TV Connector	•	
Phonak PartnerMic™	•	
Phonak RemoteControl	•	
Apps		
myPhonak	•	

Fitting

	Terra+ RIC-R	Terra+ RIC-312 Terra RIC-312	Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP
Phonak Target	10.1 or higher	9.1 or higher	9.1 or higher	9.1 or higher	9.1 or higher
Noahlink Wireless, Noahlink Wireless 2	•	•	•	•	•
NOAHLink				•	•
HI-PRO, HI-PRO2				•	•

For more information please visit www.phonak.com/terra

For more information about myPhonak please visit www.phonak.com/apps

life is on

Since 1947, Phonak is dedicated to preserving life quality by opening new acoustic worlds. Already back then, in the days of our foundation, our company was driven by a formative conviction: We believe that well-hearing equates to well-being and thus is essential for living life to the fullest. In fact, the sense of hearing is directly linked to social, emotional, cognitive and physical well-being. Today as in future, we thrive to offer the broadest portfolio of innovative hearing solutions. And, together with our hearing care professionals, we keep on focusing on what matters most: improving speech understanding, changing people's lives and having a positive effect on society as a whole.

www.phonak.com



027-0706-02/V3.00/2024-10/htc © 2024 Sonova AG All rights reserved